



B-61425-000


REVISION RECORD					
ISSUE	E.C.O. NO.	DESCRIPTION	DATE	BY	APPR.
10		REVISED & REDRAWN ON CAD; DRILL & TAP ADDED TO "A" END	11-16-93	C.M.	
11		(A) WAS .6698/.6695	5-7-98	D.W.	SV
12		(A) WAS .6695/.6692	6-12-98	D.W.	

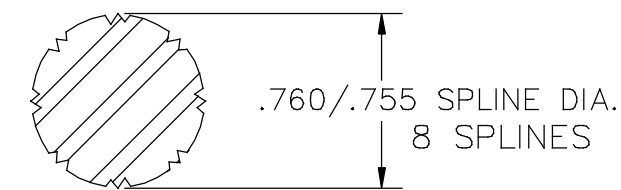

SECTION A-A
(SCALE 2=1)

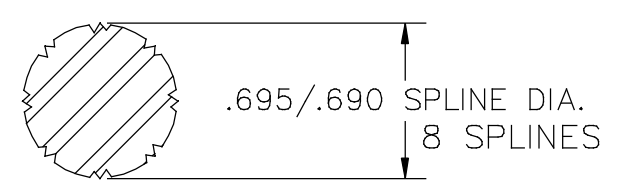

SECTION B-B
(SCALE 2=1)

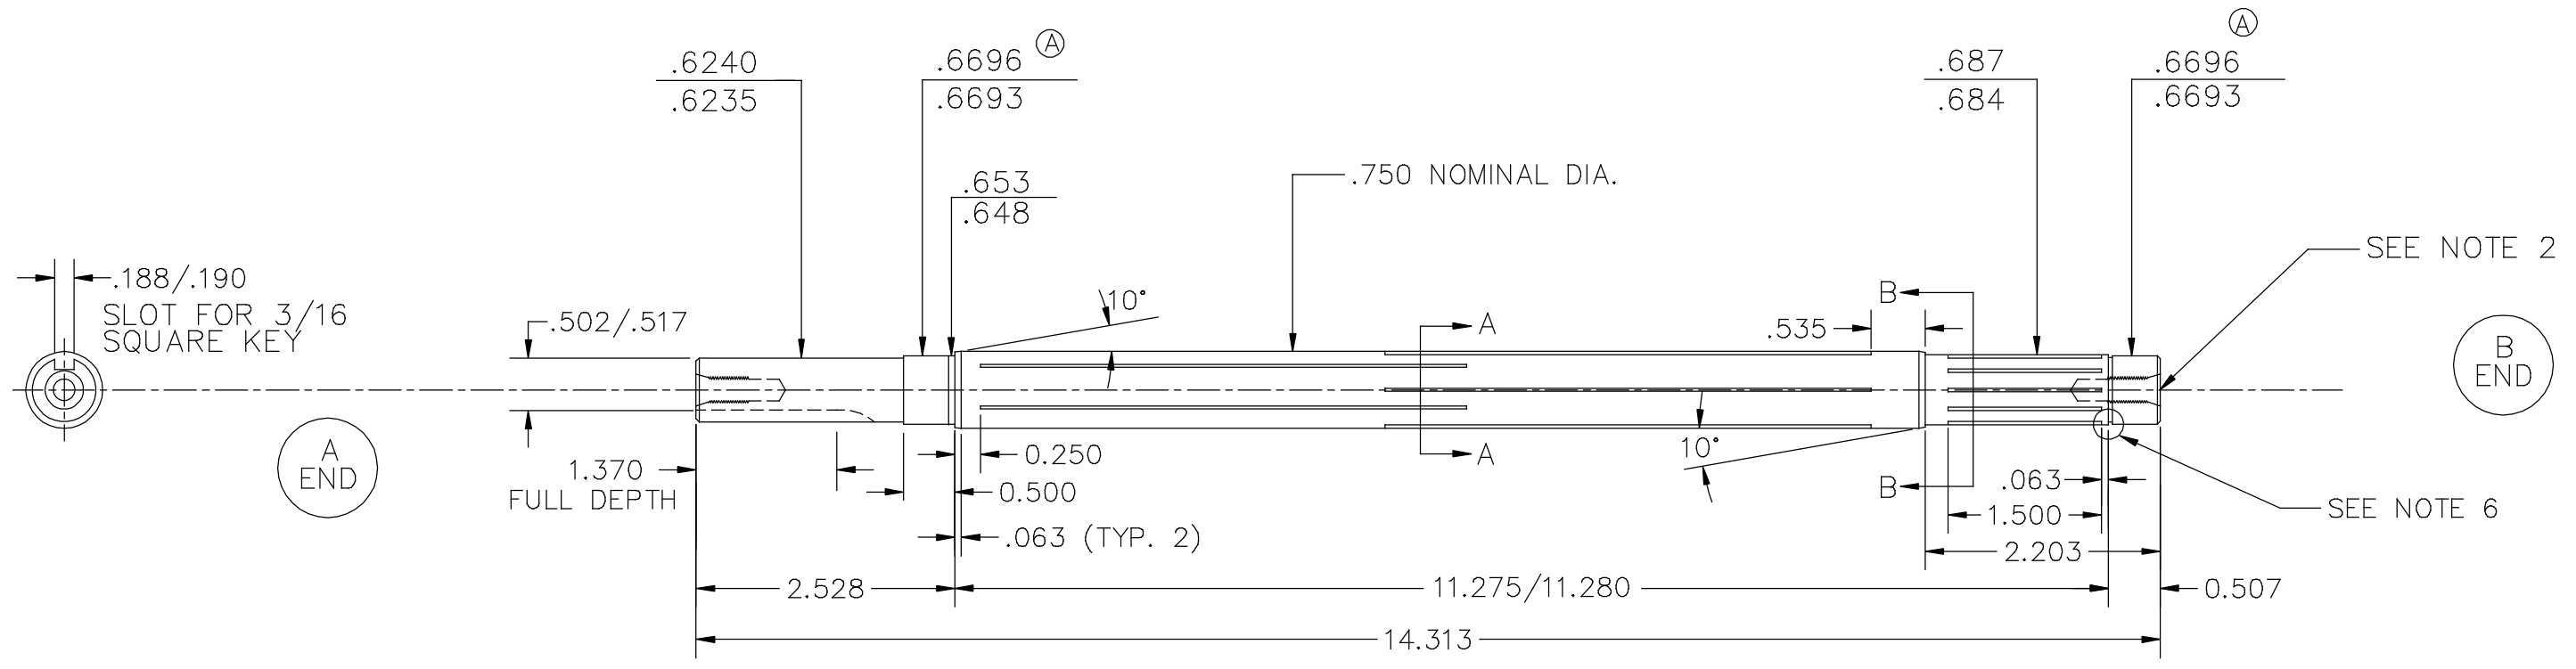

REF: 60927 & 20548

- NOTES:
1. MACHINING PER SPECIFICATION A-58990
 2. CENTER DRILL TO .312 DIA.; DRILL & TAP 1/4-28 UNF-2B X .375 MIN. DEPTH (BOTH ENDS)
 3. BREAK SHARP EDGES .030 X 45 ° (EXCEPT AS NOTED)
 4. ALL MACHINED DIAMETERS $\sqrt{63}$ MAX.
 5. LOCATE SMALL END OF SPLINE TAPER TOWARDS "B" END
 6. MACHINE GROOVE .039/.042 WIDE X .626/.632 DIA.

UNLESS OTHERWISE SPECIFIED		MACHINED SURFACE TEXTURE	ALL DIMENSIONS GIVEN IN INCHES					
FRACTIONS ±	ANGULAR		WORK TO DIMENSIONS					
1. PLACE DEC. ± .1	± 1.5°		- DO NOT SCALE -					
2. PLACE DEC. ± .03		DRAWN BY	DATE	CH'KD BY	DATE	APP'D BY	DATE	SCALE
3. PLACE DEC. ± .005		C.M.	11-16-93	P.S.	4-11-94			1=1.75
MATERIAL:		A-100,005-610		.750 DIA. STEEL				
FINISH	TITLE		SHAFT					
ASS'Y	C-61426-3							
MODEL	2FS2PC-1							
THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO WINCO, UNAUTHORIZED USE IS PROHIBITED.				PART NO. B-61425-000				