

WINCO®

DL6000H/HE

FEATURES

Honda GX340 Engine

You expect the best; you get the best. The Honda GX340 engine has more power, lower fuel consumption, and lower emissions than previous versions.

Low oil protection

In the event there is low oil level, the engine will shut down, which will protect the engine from damage.

Powder coat paint

For an incredibly durable finish.

Sturdy wrap-around welded cradle

We use 1" tubular steel for dependable durability.

Non-corrosive fuel tank


The EPA approved steel fuel tank design eliminates carbon emissions.

100% load tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

DYNA POWER PRODUCTS

6,000 Surge Watts
5,500 Continuous Watts

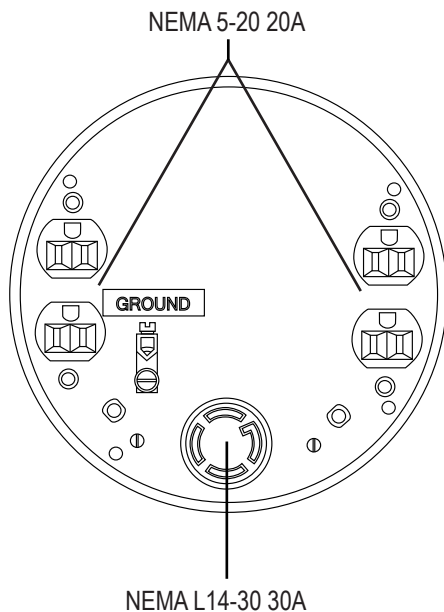

OPTIONAL ACCESSORIES

Two wheel, flat-free dolly kit

Portability is important to get your generator where it needs to be.

Generator cover

When your generator is not in use, you will want to keep it dust and debris free.

Plug-in line 120 VAC voltage monitor

To verify the voltage output.

WINCO emergency transfer service kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

30 amp (NEMA L14-30P) plug

You supply the length of cord you need. We offer the plug.

GENERATOR

| | |
|-----------------------------------|---------------------|
| ORIGIN | USA |
| SURGE WATTS | 6000 |
| CONTINUOUS WATTS | 5500 |
| CONTINUOUS AMPS | 45/22.9 |
| OUTPUT | 120/240 VAC |
| VOLTAGE REGULATION | CAPACITOR +/-5% |
| FREQUENCY REGULATION | +/-3% |
| MAIN CIRCUIT BREAKER | (2) 25 AMP |
| NEUTRAL BONDED | YES |
| 120 VOLT RECEPTACLES | (2) NEMA 5-20 20A |
| 120/240 VOLT RECEPTACLES | (1) NEMA L14-30 30A |
| LIFTING EYE | NO |
| 2-WHEEL DOLLY KIT | OPTIONAL |
| PROTECTIVE ROLL FRAME | 16 GAUGE STEEL |
| GENERATOR WARRANTY ⁽¹⁾ | 2 YRS COMMERCIAL |

NOTES: (1) For more generator warranty information contact your local WINCO dealer.



SHIPPING

| | |
|---------------------|----------------------|
| DIMENSIONS (LxWxH) | 32.75" x 22.5" x 22" |
| NET WEIGHT | 235/246 LBS |
| SHIPPING DIMENSIONS | 33" x 23" x 24.5" |
| SHIP WEIGHT | 245/256 LBS |
| FREIGHT CLASS | 70 |

ENGINE

| | |
|--|---------------------------|
| ENGINE BRAND | HONDA |
| ENGINE MODEL | GX340 |
| ENGINE STARTER | RECOIL or RECOIL/ELECTRIC |
| ENGINE SPEED | 3600 RPM |
| ENGINE CYLINDERS | V-TWIN |
| DISPLACEMENT/TYPE | 389 CC / OHV |
| LOW OIL PROTECTION | STANDARD |
| RECOMMENDED OIL ⁽¹⁾ | 10W-30 |
| OIL CAPACITY | 1.2 QTS |
| dBA AT 7 METERS | 78.5 |
| FUEL TANK | 7 GAL |
| FUEL GAUGE | ON TANK |
| HALF LOAD RUN TIME | 13 HOURS |
| MOTOR STARTING (CODE G) ⁽²⁾ | 1.5 HP |
| EPA APPROVED | YES |
| CARB APPROVED | YES |
| CSA APPROVED | NO |
| UL LISTED | NO |
| BATTERY SIZE ⁽³⁾ | BCI 20 OR 24HL 300 CCA |
| ENGINE WARRANTY ⁽⁴⁾ | 3 YRS |

NOTES: (1) This oil is recommended for most applications. See Operator's Manual for more details on the appropriate oil type for your needs. (2) Code G capacitor start motor. (3) Battery not included (4) Contact your local Honda service center for engine warranty assistance.

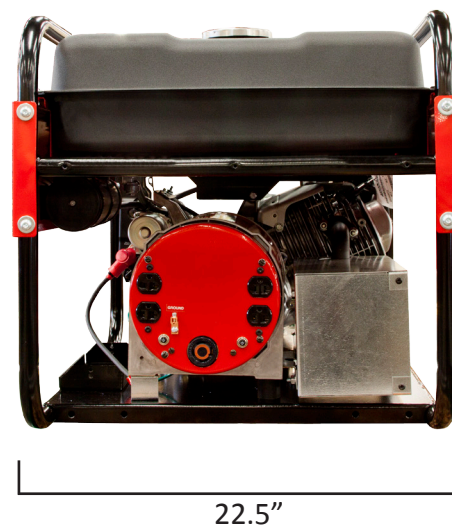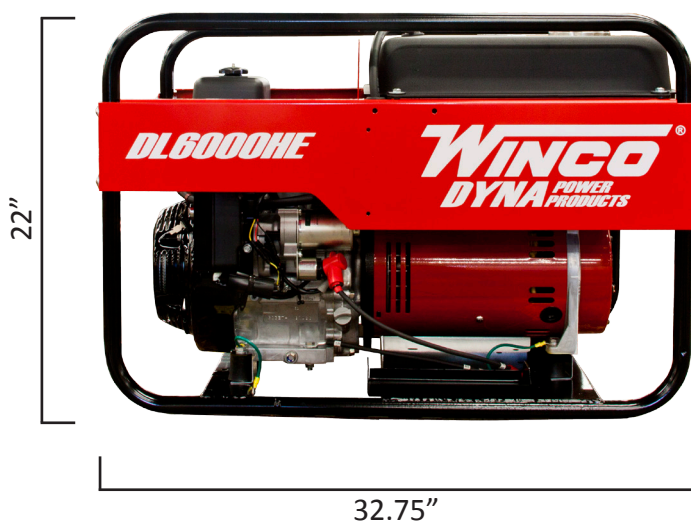

Specifications are subject to change without notice.

225 S. Cordova Ave Le Center MN • 1-800-733-2112 • www.wincogen.com